




**Basic socket series designation for:**

Series KA, CS400

**Designed to the standards and requirements of:**



MIL-DTL-12883

### SOCKET DRAWING

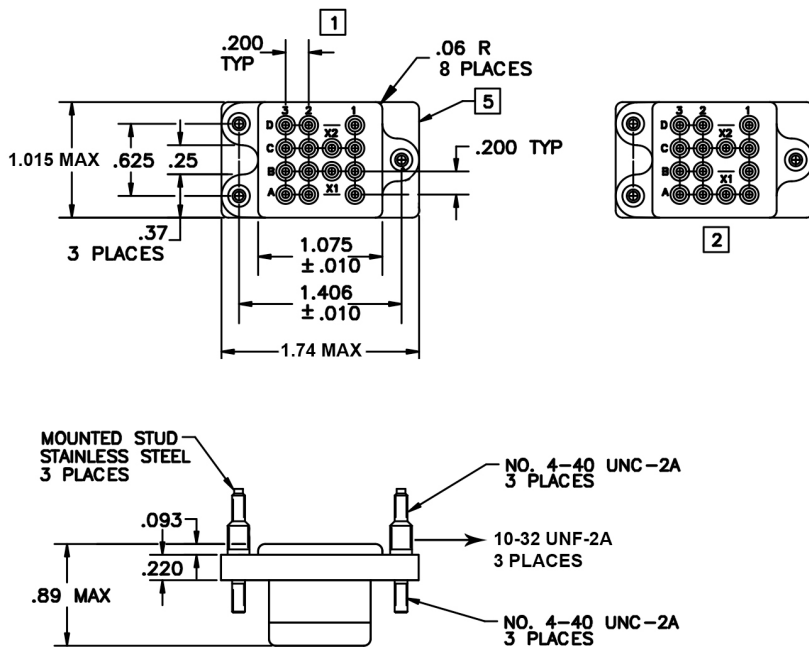

### HARDWARE MOUNTING

#### MOUNTING DETAIL 3 PLACES

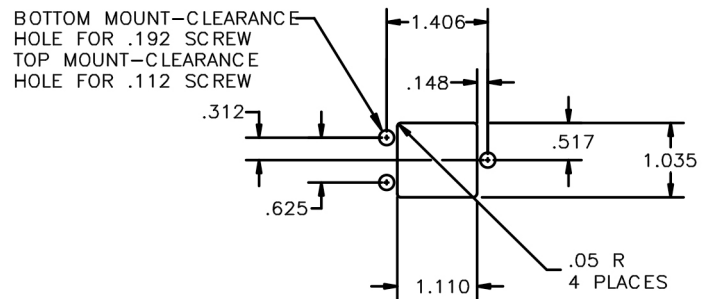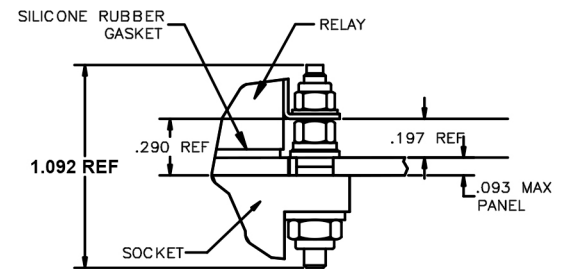

### MOUNTING DIMENSIONS

### GENERAL CHARACTERISTICS

1. Supplied with mounting hardware, No. 16 contacts, No. 16 crimp for coil 115 Vac, rear release (SO-1048-8776)	
2. Supplied with mounting hardware No. 16 contacts, and No. 16 crimp for coil 28 Vac, rear release (SO-1048-8779)	
3. Standard tolerances	.xx ± .01; xxx ± .005
4. Weight	.132 lbs. max
5. Shape optional	
6. Temperature range	-70° C to +125° C