

SO-1055-8690/10147

RELAY SOCKET 12 AMP



Basic socket series designation for:

Series JL, TDH


Designed to the standards and requirements of:


MIL-DTL-12883/41


HARDWARE MOUNTING

MOUNTING DETAIL 2 PLACES


SOCKET DRAWING



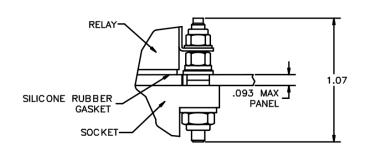

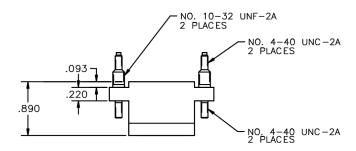

MOUNTING DIMENSIONS



GENERAL CHARACTERISTICS

1. Supplied with mounting hardware and No. 16 contacts, No. 16 crimp for power terminals; No. 22 contacts, No. 22 crimp for coil terminals (SO-1055-8690); supplied with mounting hardware and No. 16 contacts with No. 20 crimp for power terminals; No. 22 contacts, No. 22 crimp for coil terminals (SO-1055-10147).

2. Standard tolerances

.xx \pm .01; xxx \pm .005

3. Weight

.058 lbs. max

4. Shape optional

5. Temperature range

-70° C to +125° C