





Basic socket series designation for: _____

Series XCL

Designed to the standards and requirements of: _____


MIL-S-12883

SOCKET DRAWING

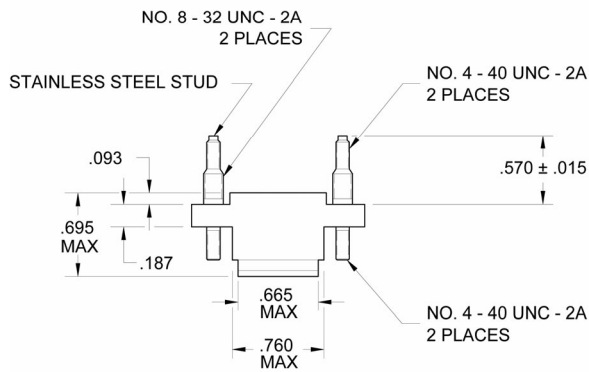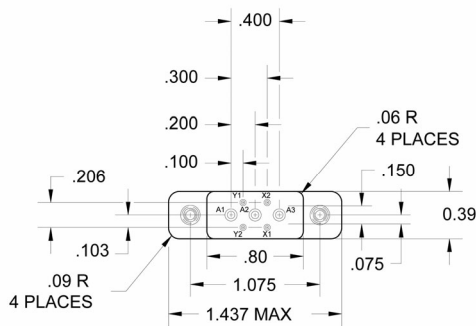


HARDWARE MOUNTING

MOUNTING DETAIL 2 PLACES

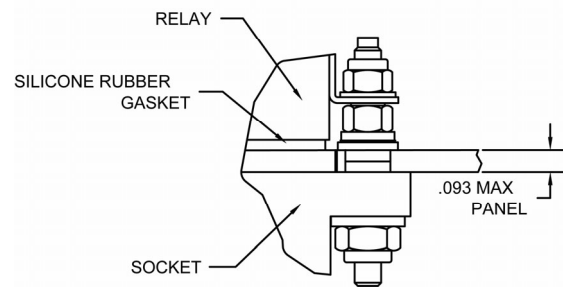

MOUNTING DIMENSIONS

BOTTOM MOUNT-CLEARANCE HOLE FOR .164 SCREW
TOP MOUNT-CLEARANCE HOLE FOR .112 SCREW

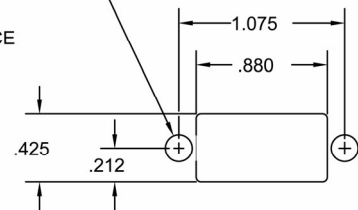

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware No. 16 contacts, No. 16 crimp for power terminals; No. 20 contacts, No. 20 crimp for coil terminals.	
2. Standard tolerances	.xx ± .01; xxx ± .005
3. Weight	.036 lbs. max
4. Temperature range	-70° C to +125° C