



**Basic socket series designation for:**

Series X (Track Mount)  
Series TD-1609, TD-1610 (Track Mount)


**Qualified to:**

MIL-DTL-12883/52

**Applicable Track**

MT-3000-03

## SOCKET TRACK DRAWING

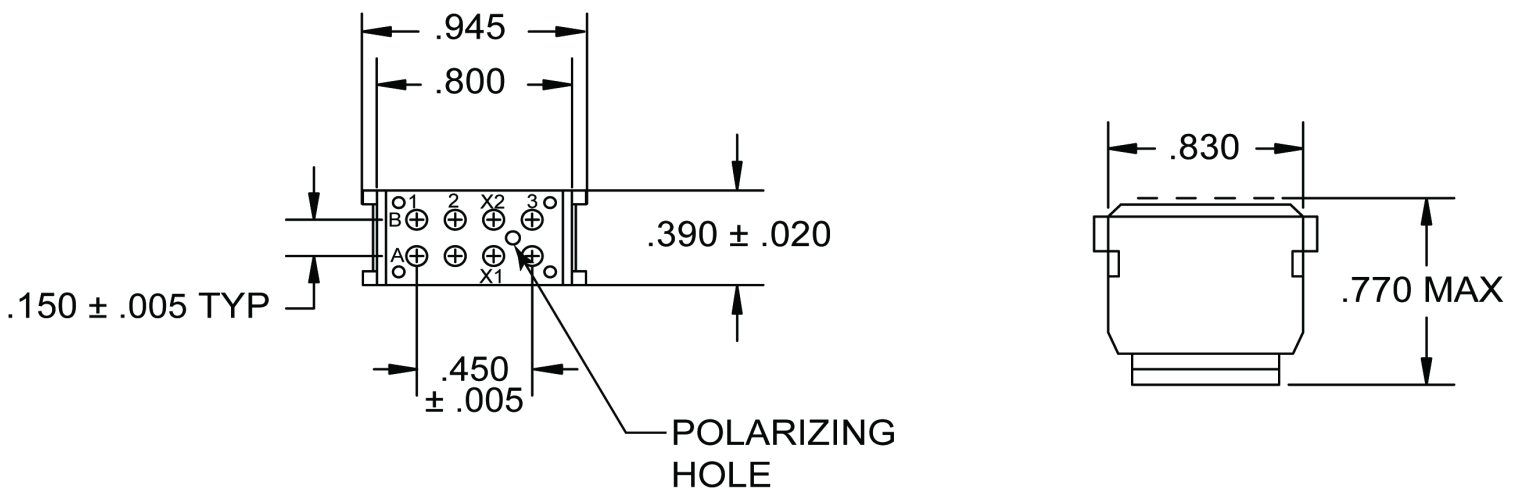

## GENERAL CHARACTERISTICS

1. Supplied with No. 20 contacts and No. 20 crimp.	
2. Standard tolerances	.xx ± .03; xxx ± .010
3. Weight	.016 lbs. max
4. Operating temperature	-70° C to +125° C
5. Used in conjunction with	MT-3000-003