





Basic socket series designation for:

Series K, TDH, VS

Designed to the standards and requirements of:


MIL-DLT-12883/40

SOCKET DRAWING

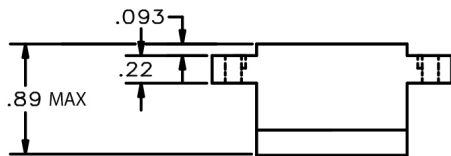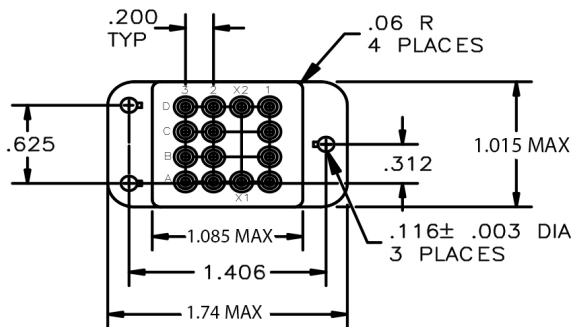


HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES

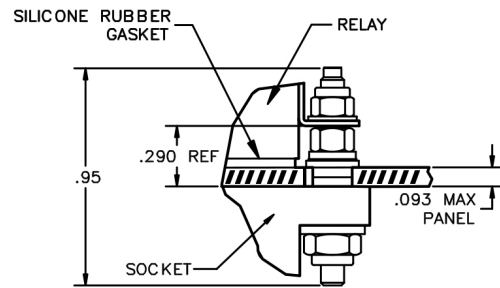

MOUNTING DIMENSIONS

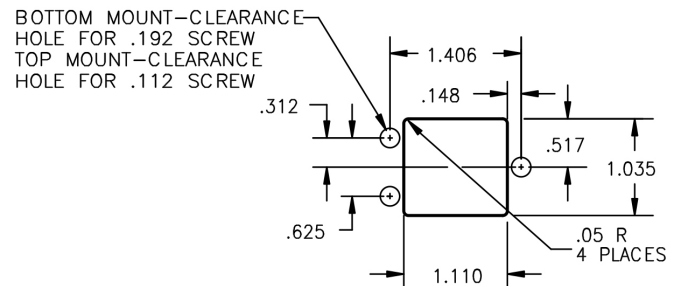

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware, No. 16 contacts, No. 16 crimp (SO-1048-8308); No. 16 contacts, No. 20 crimp (SO-1048-8518)	
2. Standard tolerances	.xx ± .01; xxx ± .005
3. Weight	.115 lbs. max
4. Temperature range	-70° C to +125° C